







The Fibretronic 5-Function linear control keypad connects to an electronics module to form a complete solution for use in softgoods. The keypad is designed for easy integration into garments, bags or other wearable accessories using a variety of construction and attachment methods.

*Not drawn to scale

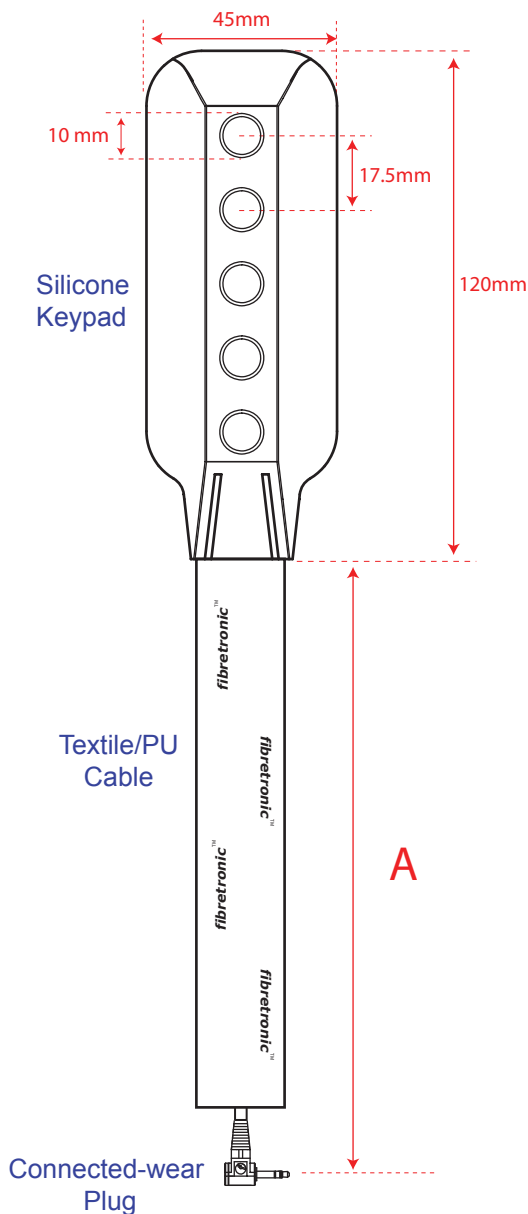

Key Function Layout


-  Volume up
-  Forward
-  Play/pause
-  Reverse
-  Volume down

Cable Length (A)	Part #
400mm	KP2-5SH-400
650mm	KP2-5SH-650
800mm	KP2-5SH-800
1000mm	KP2-5SH-1000



© Fibretronic 2010

Key Press Durability	>50,000	Weight (keypad & cable)	~20g
Key Press Operating Force	~150g	Wash Cycles	ISO 6330:2001;6A 20+
Operating Temperature Range	-30°C to 80°C	Tumble Dry Cycles	ISO 6330:2001;6A 20+
Compliance	RoHS	Dry Clean Cycles	10+



fibretronic™
embedded intelligence

www.connectedwear.com

Fibretronic Ltd (U.K.)
North Barn
Broughton Hall Business Park
Broughton
BD23 3AE
United Kingdom

p: (+44) 1756 796555
f: (+44) 1756 791555

Fibretronic Ltd (Asia)
5th Floor
Precious Industrial Centre
18 Cheung Yue Street
Cheung Sha Wan, Kowloon
Hong Kong

p: (+852) 3758 7000
f: (+852) 3580 0310

Fibretronic Ltd (U.S.A.)
3933 South Hill Street
Los Angeles
CA 90037
USA

p: (+1) 213 749 0510
f: (+1) 213 747 6162