

CONNECTED

WEAR

by *fibretronic*™



wearable technology



BTM

Bluetooth Music Phone Controller





BTM Bluetooth Music Phone Controller

CONNECTION INSTRUCTIONS

Connect any CONNECTED-wear Keypad or Joystick controller to the BTM module using the Jack Plug. Pair the BTM module with your mobile phone. Connect the Microphone (supplied) and your Headphones (not supplied) to the BTM Module as shown.


CONNECTED-wear
Joystick or
Keypad
Controller




Jack Plug

Headphones

Mic



Mobile
Music-Phone



BTM Bluetooth
Module



 **Bluetooth**[®]






OPERATING INSTRUCTIONS

To operate the Keypad controller simply press the flexible buttons. To operate the Joystick controller toggle the flexible stick to the right, to the left, upwards or downwards. Push the Joystick in the centre for Play/Pause.




Pairing *BTM* Module to Mobile Phone

To pair your mobile phone with the *BTM* module, first make sure the *BTM* module is switched OFF. Then press and hold the Play/Pause key for ~6 seconds until a Red/Blue light appears. When prompted, enter the pairing code **0000** on your mobile phone. When paired successfully the Red light will stop flashing and only the Blue light continues to flash.

Music Control Menu

KEY	MUSIC FUNCTION
	Increase the music volume
	Skip to next track
	Toggles between Play and Pause
	Skip to previous track
	Decrease the music volume

Phone Control Menu

KEY	FUNCTION	ACTION
	BTM Power ON	Press and hold ~4 sec (blue light appears)
	BTM Power OFF	Press and hold ~4 sec (red light appears)
	Pairing	Press and hold ~6 sec (blue/red light appears)
	Answer call	Short press when phone rings (< 1 sec)
	Reject call	Long press when phone rings (> 1 sec)
	End call	Short press during call (< 1 sec)
	Transfer call back to phone	Long press during call (> 1 sec)
	Re-dial last call	Double short press (< 1 sec)
	Volume Up	Press to increase the call or ringing volume
	Volume Down	Press to decrease the call or ringing volume.

BATTERY CHARGING INSTRUCTIONS

To charge the *BTM* module, plug the USB cable into the mini USB socket on the module. Plug the other cable end into a USB socket on your computer or other USB charging device. A red light will appear on the *BTM* module whilst charging. When the battery is fully charged the red light will disappear (normally ~1-2hrs).

CARE INSTRUCTIONS

Please follow the garment manufacturer's care instructions listed on the apparel item. **DO NOT WASH OR DRY CLEAN THE *BTM* MODULE OR THE MICROPHONE.** Disconnect and remove the *BTM* module and Microphone from the garment before cleaning. After washing, ensure the Keypad and Joystick controllers are thoroughly dry before use.



DO NOT WASH *BTM* MODULE. DO NOT WASH MICROPHONE.

GENERAL SPECIFICATIONS

Product Code	<i>BTM</i>
Weight	< 30g
Power Source	Rechargeable Lithium Ion Battery
Battery Life	10 hours talk time, 10 days standby
Charge Time	~ 2 hours
Mobile compatibility	Bluetooth phones with A2DP + AVRCP
Bluetooth Version	V2.0 + EDR
Approvals	CE, FCC, RoHS


CONNECTED

WEAR
by fibretronic™



BTM

The *BTM* module with Bluetooth allows you to control your music and your mobile phone from your garment or bag. Plug the *BTM* module into any product that has a **CONNECTED-wear** Keypad or Joystick controller.

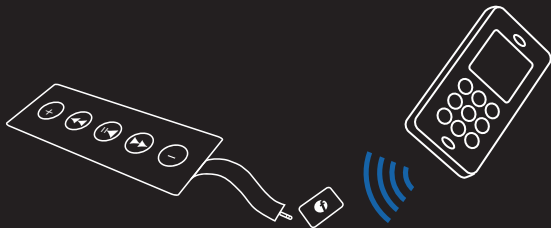

Mobile Phone Compatibility

The *BTM* module is compatible with all Bluetooth mobile phones with A2DP + AVRCP

CONNECTED-wear, by Fibretronic, is a unique system of integrated controls in garments, bags and other soft goods. **CONNECTED-wear** Keypad and Joysticks can control audio players, mobile phones and other personal electronics. Just select the **CONNECTED-wear** module of your choice and get **CONNECTED....**

www.connectedwear.com



CONNECTED-wear and Fibretronic are trademarks of Fibretronic Limited

Bluetooth Music Phone Controller